
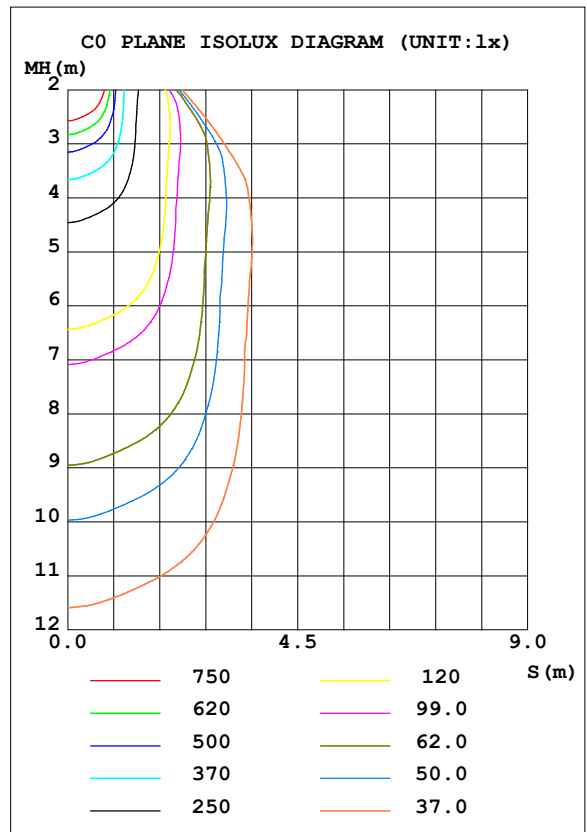


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 90.84 lm/W			
MODEL		I <sub>max</sub> (cd)	4978	S/MH (C0/180)	0.83
NOMINAL POWER (W)	60	LOR (%)	100.0	S/MH (C90/270)	0.81
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	5041.4	η UP, DN (C0-180)	0.3, 49.8
NOMINAL FLUX (lm)	5041.37	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.6, 49.3
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	220	η down (%)	99.1	CIBSE SHR MAX	0.80

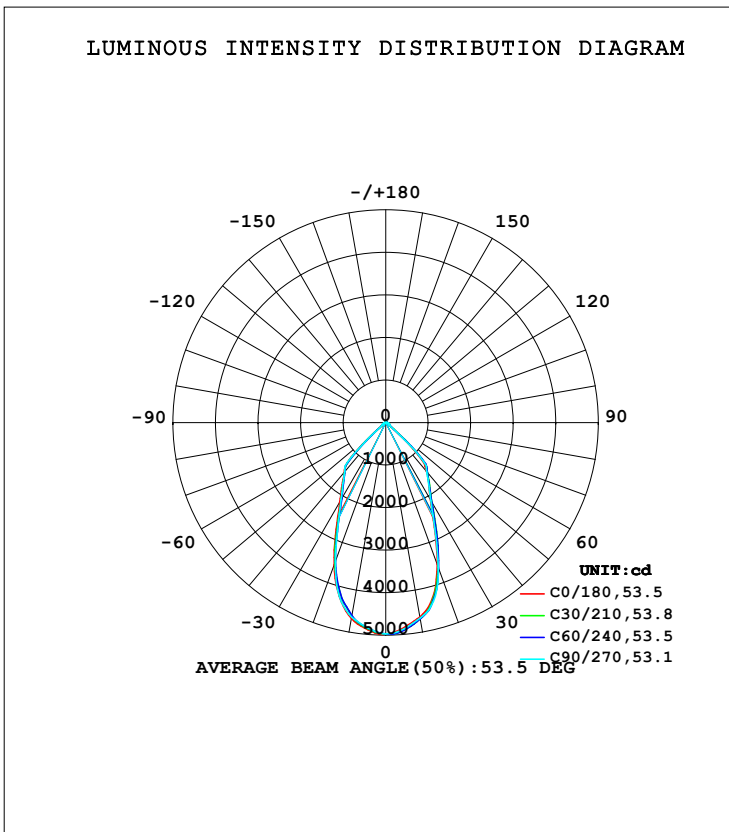

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity: 65.0%  
 Test Distance: 8.000m [K=0.7125]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	4636	4682	4668	4662	4676	4606	4637	4604	0- 10	457.4	457.4	9.07,9.07
20	3550	3625	3624	3530	3557	3487	3471	3550	10- 20	1174	1631	32.4,32.4
30	2118	2179	2127	2125	2168	2084	2108	2126	20- 30	1260	2892	57.4,57.4
40	1496	1529	1502	1494	1514	1501	1503	1490	30- 40	1111	4003	79.4,79.4
50	233.1	260.6	252.1	193.7	212.0	196.3	193.0	238.8	40- 50	766.7	4770	94.6,94.6
60	87.21	88.70	85.36	86.28	91.15	88.58	89.56	91.19	50- 60	105.9	4876	96.7,96.7
70	50.89	52.56	50.25	51.42	56.70	54.86	57.16	55.91	60- 70	68.99	4944	98.1,98.1
80	16.83	21.07	18.56	18.47	24.82	22.36	23.63	23.53	70- 80	41.17	4986	98.9,98.9
90	2.057	2.033	2.047	3.055	9.750	10.01	9.762	9.124	80- 90	9.322	4995	99.1,99.1
100	2.856	2.814	2.830	3.919	11.00	11.27	11.01	10.33	90-100	7.112	5002	99.2,99.2
110	3.707	3.666	3.686	4.797	11.99	12.21	11.99	11.29	100-110	7.937	5010	99.4,99.4
120	4.504	4.467	4.470	5.504	12.21	12.37	12.14	11.55	110-120	8.168	5018	99.5,99.5
130	5.073	5.062	5.066	5.914	11.42	11.46	11.28	10.82	120-130	7.541	5026	99.7,99.7
140	5.230	5.247	5.232	5.866	9.975	9.950	9.817	9.505	130-140	6.191	5032	99.8,99.8
150	5.199	5.216	5.212	5.637	8.303	8.249	8.123	7.920	140-150	4.516	5036	99.9,99.9
160	4.983	4.997	5.045	5.235	6.815	6.767	6.714	6.534	150-160	2.936	5039	100,100
170	4.474	4.501	4.469	4.582	5.375	5.293	5.227	5.198	160-170	1.543	5041	100,100
180	4.537	4.558	4.413	4.469	4.549	4.546	4.427	4.461	170-180	0.4448	5041	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

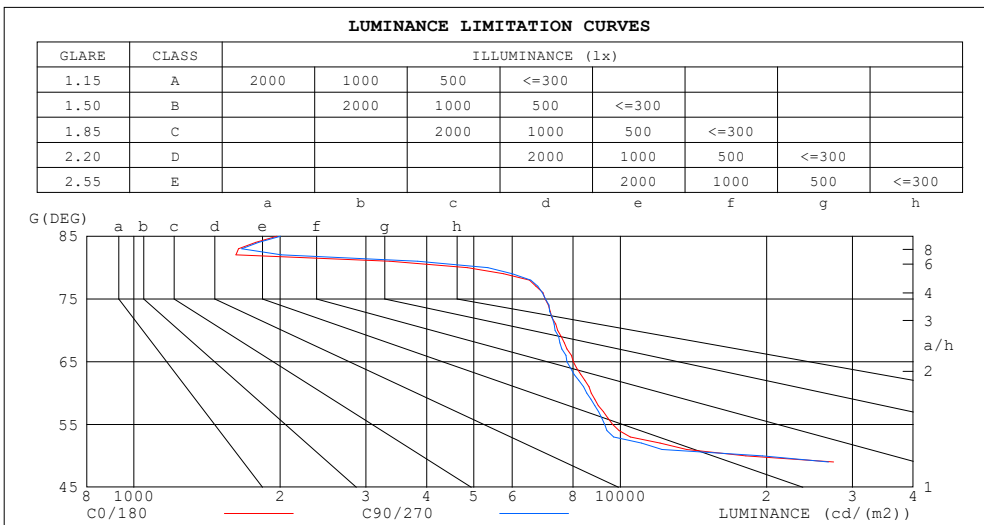


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

ρcc	80%			70%			50%			30%			10%			0		
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
ρw	0																	
ρfc	20%			20%			20%			20%			20%			0		
RCR	RCR:Room Cavity Ratio																	
	Coefficients of Utilization(CU)																	
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99		
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91		
2.0	1.01	.96	.92	.99	.95	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83		
3.0	.93	.87	.83	.91	.86	.82	.89	.84	.81	.86	.82	.79	.83	.80	.78	.76		
4.0	.86	.80	.75	.85	.79	.74	.82	.77	.73	.80	.76	.72	.78	.74	.72	.70		
5.0	.80	.73	.68	.79	.72	.68	.77	.71	.67	.75	.70	.67	.73	.69	.66	.64		
6.0	.74	.67	.63	.73	.67	.62	.71	.66	.62	.70	.65	.61	.68	.64	.61	.59		
7.0	.69	.62	.58	.68	.62	.58	.67	.61	.57	.65	.60	.57	.64	.60	.56	.55		
8.0	.64	.58	.53	.64	.58	.53	.63	.57	.53	.61	.56	.53	.60	.56	.52	.51		
9.0	.60	.54	.50	.60	.54	.50	.59	.53	.49	.58	.53	.49	.57	.52	.49	.47		
10.0	.57	.51	.46	.56	.50	.46	.55	.50	.46	.55	.49	.46	.54	.49	.46	.44		

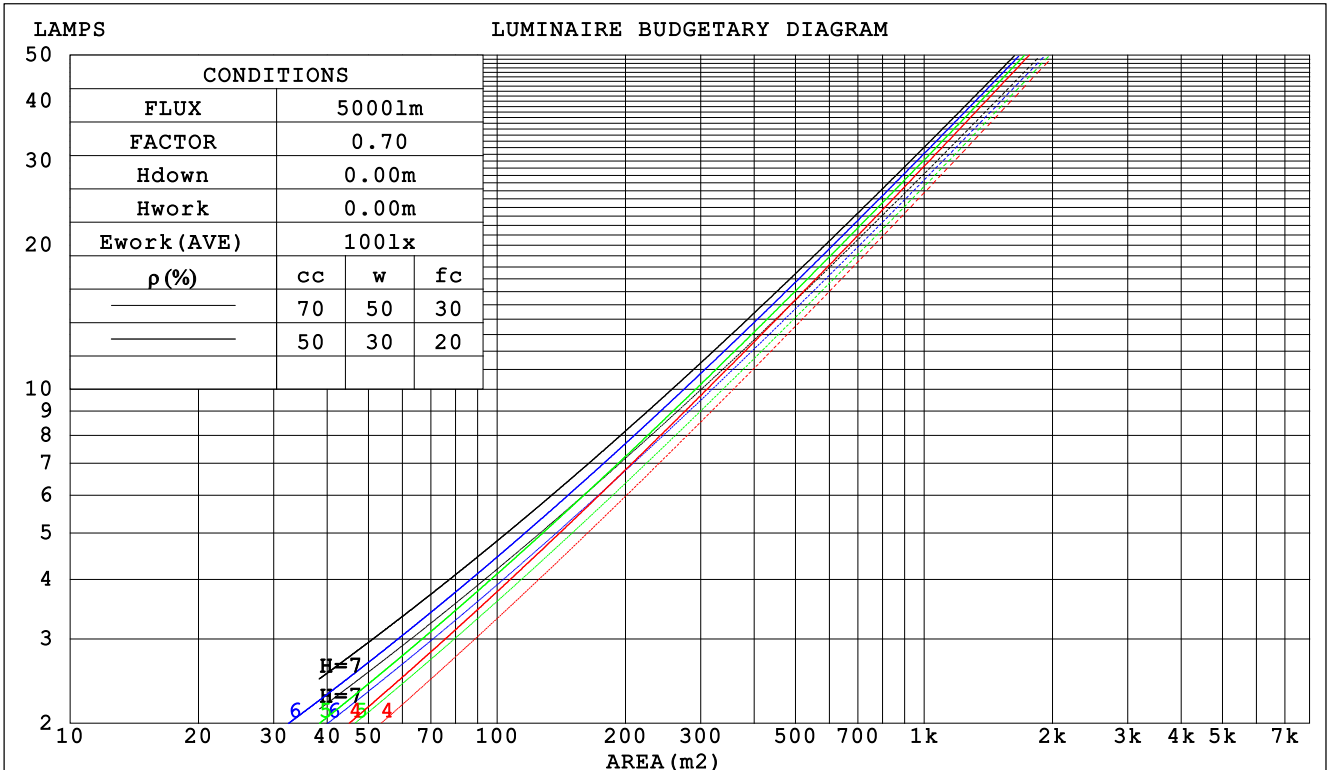

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

WEC AND CCEC

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.199	.113	.036	.192	.109	.035	.179	.102	.033	.166	.096	.031	.155	.090	.029	
2.0	.191	.105	.032	.185	.102	.031	.174	.097	.030	.164	.092	.029	.154	.087	.027	
3.0	.182	.097	.029	.177	.095	.029	.167	.091	.028	.158	.087	.027	.150	.083	.026	
4.0	.173	.090	.026	.169	.088	.026	.160	.085	.025	.152	.082	.025	.145	.079	.024	
5.0	.165	.084	.024	.161	.082	.024	.153	.080	.023	.146	.077	.023	.140	.075	.022	
6.0	.157	.078	.022	.153	.077	.022	.146	.075	.022	.140	.073	.021	.134	.071	.021	
7.0	.149	.074	.021	.146	.073	.021	.140	.071	.020	.134	.069	.020	.129	.067	.020	
8.0	.142	.069	.020	.139	.069	.019	.134	.067	.019	.129	.065	.019	.124	.064	.019	
9.0	.136	.066	.018	.133	.065	.018	.128	.063	.018	.124	.062	.018	.119	.061	.018	
10.0	.130	.062	.017	.127	.061	.017	.123	.060	.017	.119	.059	.017	.115	.058	.017	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.180	.164	.150	.154	.141	.129	.105	.097	.089	.061	.056	.052	.019	.018	.017	
2.0	.166	.140	.117	.142	.120	.101	.097	.083	.071	.056	.048	.041	.018	.016	.014	
3.0	.155	.121	.094	.133	.104	.081	.091	.072	.057	.053	.042	.034	.017	.014	.011	
4.0	.145	.106	.077	.125	.092	.067	.086	.064	.047	.050	.038	.028	.016	.012	.009	
5.0	.137	.095	.064	.118	.082	.056	.081	.058	.039	.047	.034	.023	.015	.011	.008	
6.0	.130	.086	.055	.112	.075	.048	.077	.052	.034	.045	.031	.020	.014	.010	.007	
7.0	.124	.079	.047	.107	.068	.041	.074	.048	.029	.043	.028	.017	.014	.009	.006	
8.0	.118	.073	.042	.102	.063	.036	.070	.044	.026	.041	.026	.015	.013	.009	.005	
9.0	.113	.068	.037	.097	.059	.032	.068	.041	.023	.039	.024	.014	.013	.008	.005	
10.0	.108	.063	.033	.093	.055	.029	.065	.039	.021	.038	.023	.012	.012	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	23.9	23.1	24.1	24.3	22.9	24.0	23.2	24.2	24.4
3H	22.8	23.8	23.1	24.0	24.2	22.8	23.8	23.1	24.0	24.3
4H	22.8	23.7	23.1	23.9	24.2	22.8	23.7	23.1	24.0	24.2
6H	22.7	23.6	23.1	23.9	24.1	22.8	23.6	23.1	23.9	24.2
8H	22.7	23.5	23.0	23.8	24.1	22.7	23.6	23.1	23.8	24.1
12H	22.6	23.4	23.0	23.7	24.0	22.7	23.5	23.0	23.8	24.1
4H 2H	22.7	23.6	23.0	23.8	24.1	22.7	23.6	23.0	23.9	24.1
3H	22.6	23.4	23.0	23.7	24.0	22.7	23.5	23.0	23.8	24.1
4H	22.7	23.4	23.0	23.7	24.0	22.7	23.4	23.1	23.7	24.1
6H	22.6	23.3	23.0	23.6	24.0	22.7	23.3	23.1	23.7	24.0
8H	22.6	23.2	23.0	23.6	23.9	22.6	23.2	23.1	23.6	24.0
12H	22.6	23.1	23.0	23.5	23.9	22.6	23.1	23.0	23.5	23.9
8H 4H	22.6	23.2	23.0	23.5	23.9	22.6	23.2	23.0	23.6	23.9
6H	22.6	23.1	23.0	23.5	23.9	22.6	23.1	23.1	23.5	24.0
8H	22.5	23.0	23.0	23.4	23.9	22.6	23.0	23.1	23.4	23.9
12H	22.5	22.9	23.0	23.3	23.8	22.5	22.9	23.0	23.4	23.8
12H 4H	22.5	23.1	23.0	23.5	23.9	22.6	23.1	23.0	23.5	23.9
6H	22.6	23.0	23.0	23.4	23.9	22.6	23.0	23.1	23.4	23.9
8H	22.5	22.9	23.0	23.3	23.8	22.5	22.9	23.0	23.4	23.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 6.0					+ 2.9 / - 6.0				
1.5H	+ 2.6 / - 6.7					+ 2.5 / - 6.8				
2.0H	+ 6.5 / - 4.3					+ 6.8 / - 4.5				

CIE Pub.117, 5041 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.6)  
 Area: 0.02 m2

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	87	80	75	85	79	75	70
1.00	93	86	82	92	86	82	91	86	81	76
1.25	98	92	88	97	91	87	95	90	86	81
1.50	102	96	92	100	95	91	98	93	90	85
2.00	106	100	97	104	99	96	101	97	94	88
2.50	108	103	99	106	102	98	103	99	96	90
3.00	110	105	102	108	104	101	104	101	99	92
4.00	112	108	106	110	107	104	106	103	101	94
5.00	113	110	108	111	109	106	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

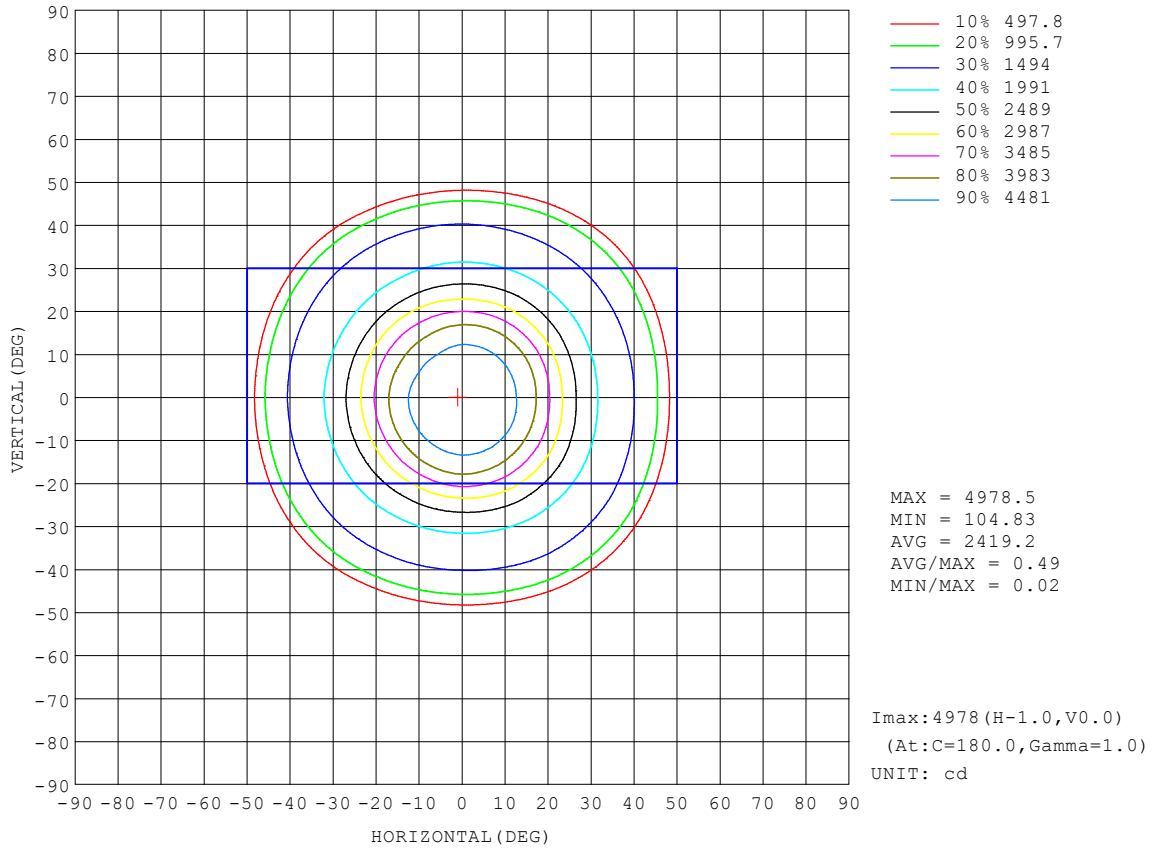


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:



**AAI Figure**

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

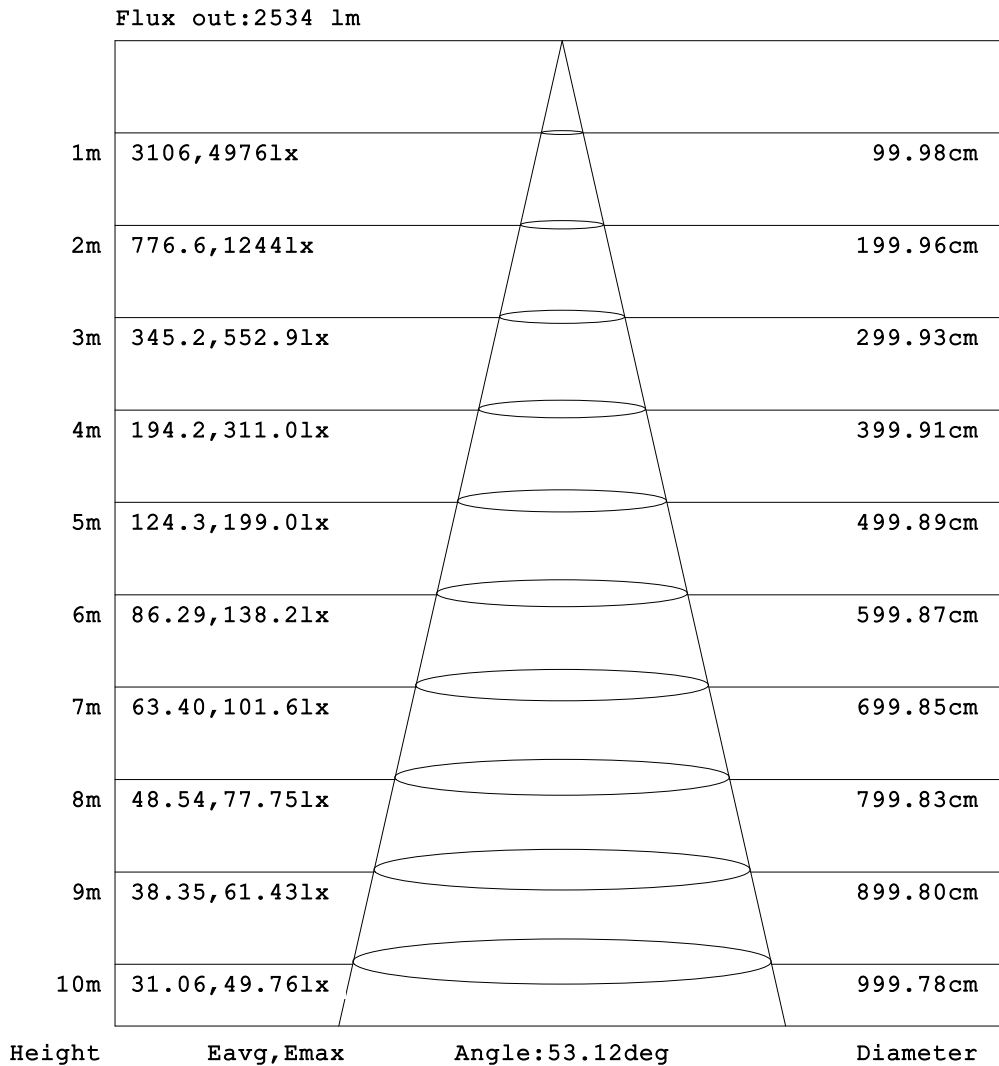


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

**ISOLUX DIAGRAM**


<b>Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz</b> <b>Lamp Flux:5041.37x1 lm</b>		
<b>NAME: EGT 60W suspending down light 3000K RA90</b>	<b>TYPE: LED</b>	
<b>MFR.:</b>		

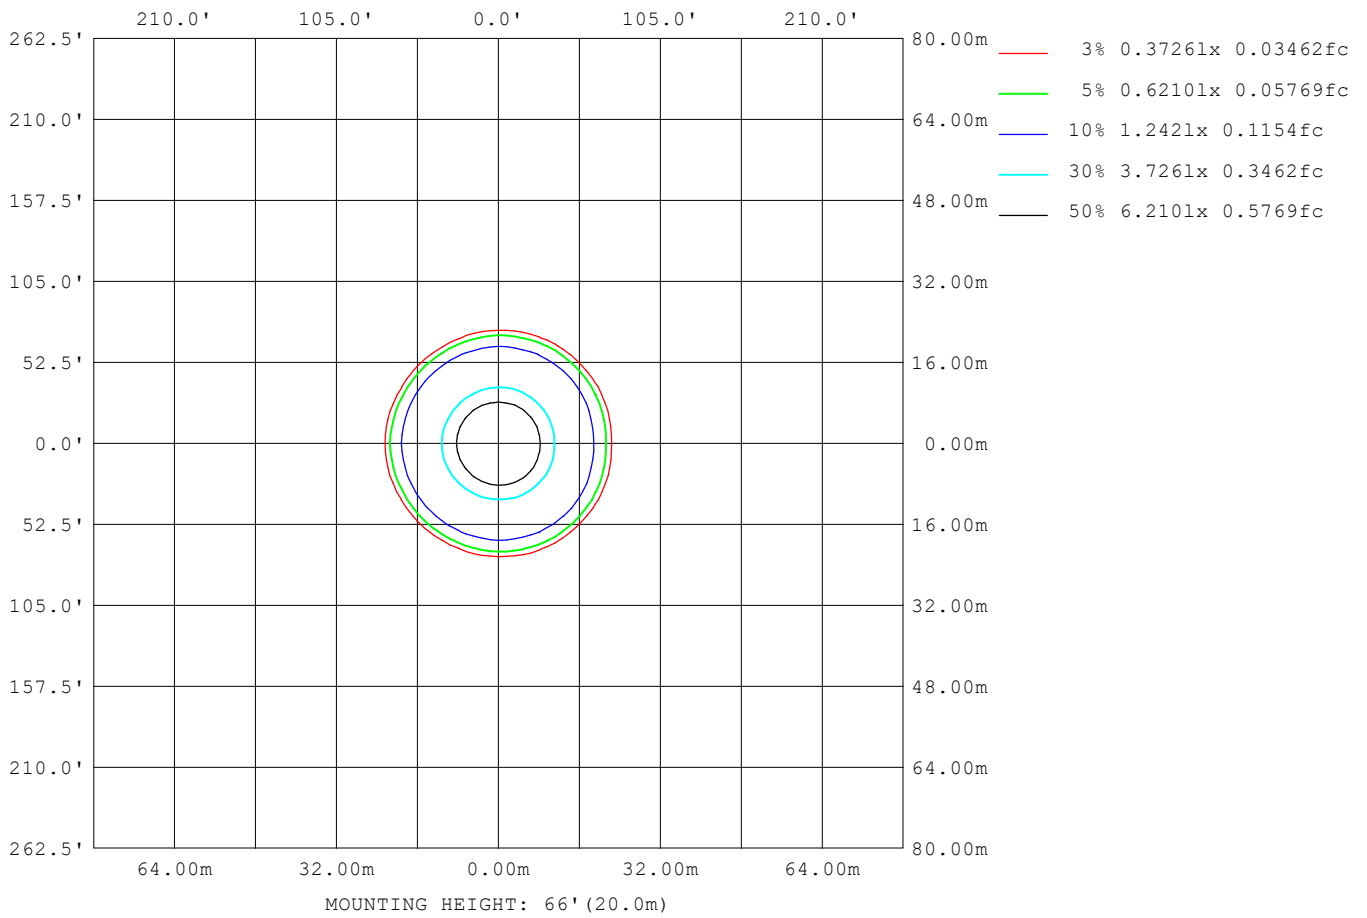

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

**Planar Illuminance Curve**

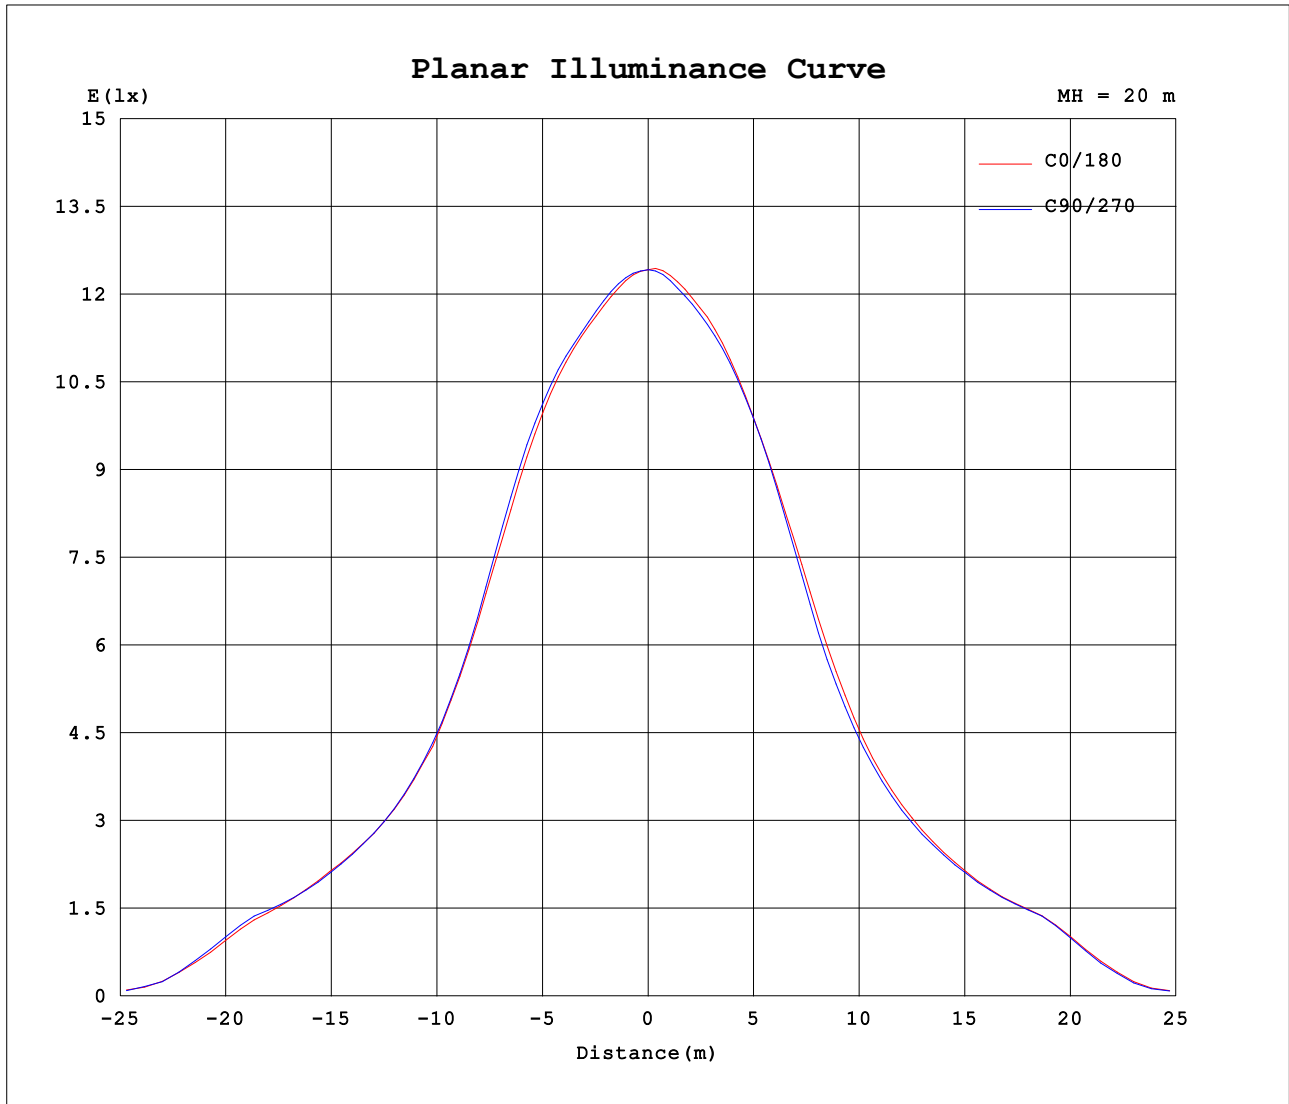

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity: 65.0%  
 Test Distance: 8.000m [K=0.7125]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.70V I:0.2560A P:55.500W PF:0.9780 Freq:50.00Hz		
Lamp Flux:5041.37x1 lm		
NAME: EGT 60W suspending down light 3000K RA90	TYPE: LED	
MFR.:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4968	4968	4968	4968	4968	4968	4968	4968	4968	4968	4968	4968							
5	4838	4897	4902	4874	4870	4879	4889	4867	4850	4843	4823	4818							
10	4636	4679	4686	4668	4658	4666	4676	4613	4599	4637	4608	4599							
15	4266	4293	4328	4350	4291	4247	4230	4151	4148	4226	4279	4296							
20	3550	3611	3638	3624	3541	3519	3557	3506	3467	3471	3532	3568							
25	2717	2834	2824	2735	2691	2713	2765	2702	2654	2658	2706	2733							
30	2118	2182	2176	2127	2113	2138	2168	2098	2071	2108	2124	2128							
35	1777	1799	1791	1766	1753	1766	1790	1754	1740	1759	1752	1755							
40	1496	1530	1528	1502	1491	1498	1514	1503	1498	1503	1492	1487							
45	1078	1198	1213	1150	1070	1082	1153	1054	1037	1130	1178	1166							
50	233	257	264	252	201	187	212	202	191	193	229	248							
55	111	110	108	107	107	109	112	109	107	108	109	110							
60	87.2	89.3	88.1	85.4	85.0	87.6	91.1	89.1	88.1	89.6	91.4	91.0							
65	67.7	68.7	67.7	65.6	65.1	67.7	71.6	69.3	68.7	70.9	72.0	71.1							
70	50.9	52.9	52.3	50.2	50.0	52.8	56.7	54.9	54.8	57.2	57.0	54.9							
75	36.3	38.8	38.4	36.3	36.5	39.1	42.4	40.6	40.2	42.0	42.1	40.3							
80	16.8	21.0	21.1	18.6	17.1	19.8	24.8	22.8	21.9	23.6	24.5	22.6							
85	3.43	3.51	3.52	3.49	3.03	5.86	10.8	11.1	10.7	10.6	11.1	9.10							
90	2.06	2.03	2.03	2.05	1.58	4.53	9.75	10.2	9.82	9.76	10.2	8.03							
95	2.42	2.38	2.38	2.39	1.93	5.00	10.4	10.9	10.5	10.4	10.9	8.63							
100	2.86	2.82	2.81	2.83	2.35	5.48	11.0	11.5	11.1	11.0	11.5	9.17							
105	3.30	3.24	3.24	3.28	2.79	5.97	11.6	12.0	11.6	11.5	12.0	9.68							
110	3.71	3.67	3.66	3.69	3.21	6.39	12.0	12.4	12.0	12.0	12.5	10.1							
115	4.13	4.09	4.08	4.10	3.62	6.74	12.2	12.6	12.2	12.2	12.7	10.4							
120	4.50	4.47	4.46	4.47	4.02	6.99	12.2	12.6	12.2	12.1	12.6	10.5							
125	4.83	4.81	4.80	4.80	4.40	7.14	11.9	12.2	11.8	11.8	12.3	10.3							
130	5.07	5.06	5.06	5.07	4.69	7.13	11.4	11.6	11.3	11.3	11.7	9.94							
135	5.20	5.20	5.19	5.19	4.86	7.01	10.8	10.9	10.6	10.6	11.0	9.45							
140	5.23	5.25	5.25	5.23	4.95	6.78	9.98	10.1	9.80	9.82	10.2	8.86							
145	5.21	5.24	5.24	5.22	5.00	6.51	9.12	9.20	8.94	8.94	9.21	8.16							
150	5.20	5.22	5.22	5.21	5.04	6.23	8.30	8.36	8.14	8.12	8.33	7.51							
155	5.13	5.14	5.16	5.17	5.01	5.93	7.54	7.57	7.40	7.39	7.53	6.88							
160	4.98	4.98	5.01	5.04	4.89	5.58	6.82	6.83	6.70	6.71	6.78	6.28							
165	4.70	4.73	4.74	4.74	4.60	5.14	6.12	6.11	5.99	6.01	6.07	5.69							
170	4.47	4.50	4.50	4.47	4.40	4.76	5.37	5.35	5.24	5.23	5.30	5.09							
175	4.45	4.49	4.46	4.39	4.41	4.53	4.69	4.71	4.64	4.54	4.60	4.60							
180	4.54	4.59	4.53	4.41	4.44	4.50	4.55	4.57	4.52	4.43	4.44	4.48							

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2023-12-11

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks: