


Specification

Product Name:	LED Sidelit Panel Series
Model:	SIGNO-SLP-2*2-25W-ZZ-01
	SIGNO-SLP-2*2-25W-ZZ-02
	SIGNO-SLP-2*2-30W-ZZ-01
	SIGNO-SLP-2*2-30W-ZZ-02
	SIGNO-SLP-2*2-36W-ZZ-01
	SIGNO-SLP-2*2-36W-ZZ-02
	SIGNO-SLP-1*4-36W-ZZ-01
	SIGNO-SLP-1*4-36W-ZZ-02
	SIGNO-SLP-2*2-40W-ZZ-01
	SIGNO-SLP-2*2-40W-ZZ-02
	SIGNO-SLP-1*4-40W-ZZ-01
	SIGNO-SLP-1*4-40W-ZZ-02
	SIGNO-SLP-2*4-50W-ZZ-01
	SIGNO-SLP-2*4-50W-ZZ-02

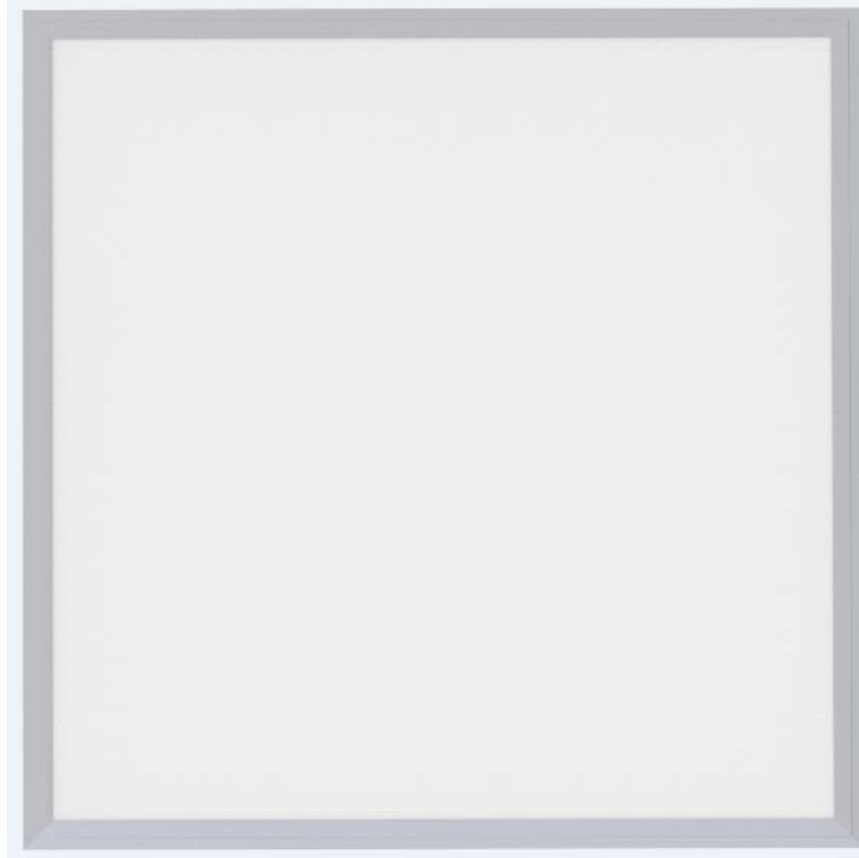

1. Product Description

- Elegant appearance panel design. Silver and White color for option
- Suitable for recessed, suspended, ceiling installation
- Comply with CE standard
- LIFUD/GREENSO/ZHENGYUAN/Flicker free driver

2. Applications

- Office
- Corridors
- Conference rooms
- Reception areas
- Foyers
- Elevators
- Suitable for recessed ceiling systems with grid size of 595x595mm or 295x1195mm

3. Model List

Model	Power/w	Lumen/W	CCT/k	Ra	Voltage/v	UGR	Lifetime/hrs
SIGNO-SLP6-12-25W-ZZ-01	25	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-12-25W-ZZ-02	25	120	3000K 4000K,6500K	>80	200-240V	19	50000
SIGNO-SLP6-12-30W-ZZ-01	30	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-12-30W-ZZ-02	30	120	3000K 4000K,6500K	>80	200-240V	19	50000
SIGNO-SLP6-22-30W-ZZ-01	30	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-22-30W-ZZ-02	30	120	3000K 4000K,6500K	>80	200-240V	19	50000
SIGNO-SLP6-22-36W-ZZ-01	36	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-22-36W-ZZ-02	36	120	3000K 4000K,6500K	>80	200-240V	19	50000
SIGNO-SLP6-14-36W-ZZ-01	36	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-14-36W-ZZ-02	36	120	3000K 4000K,6500K	>80	200-240V	19	50000
SIGNO-SLP6-22-40W-ZZ-01	40	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-22-40W-ZZ-02	40	120	3000K 4000K,6500K	>80	200-240V	19	50000
SIGNO-SLP6-14-40W-ZZ-01	40	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-14-40W-ZZ-02	40	120	3000K 4000K,6500K	>80	200-240V	19	50000
SIGNO-SLP6-24-50W-ZZ-01	50	120	3000K 4000K,6500K	>80	200-240V	22	50000
SIGNO-SLP6-24-50W-ZZ-02	50	120	3000K 4000K,6500K	>80	200-240V	19	50000

Remarks:

SIGNO-SLP-22-36W-ZZ-XX

SIGNO-SLP: Panel light Gen4

Signo International Group Limited

Email: sales@signo-group.com **TEL:** 00 86-755-2328 1364 **Web:** www.signo-group.com

22: 2*2, 14:1*4,

36W: Power 36W

ZZ: CCT 30: 3000K, 40: 4000K, 65: 6500K

XX: Diffuser type 01:UGR<22, 02: UGR<19


4. Other Characteristics

Item	Symbol	Unit	Rated Value
Input Voltage	U	v	200-240
Frequency	f	Hz	50/60
Power Factor	PF	-	0.9
Total Harmonic Distortion	THD	%	<20
Lifetime(L70/B50)	T	h	30000/50000
Ambient Temperature Range	Ta	°C	-20~45
Storage Temperature	Ts	°C	-20~80
IP Protection	-	-	IP20




Dimension	L(mm)	W(mm)	H(mm)
1*2	295	595	10
2*2	595/620	595/620	10
1*4	295	1195	10
2*4	595	1195	10

6.Light Distribution

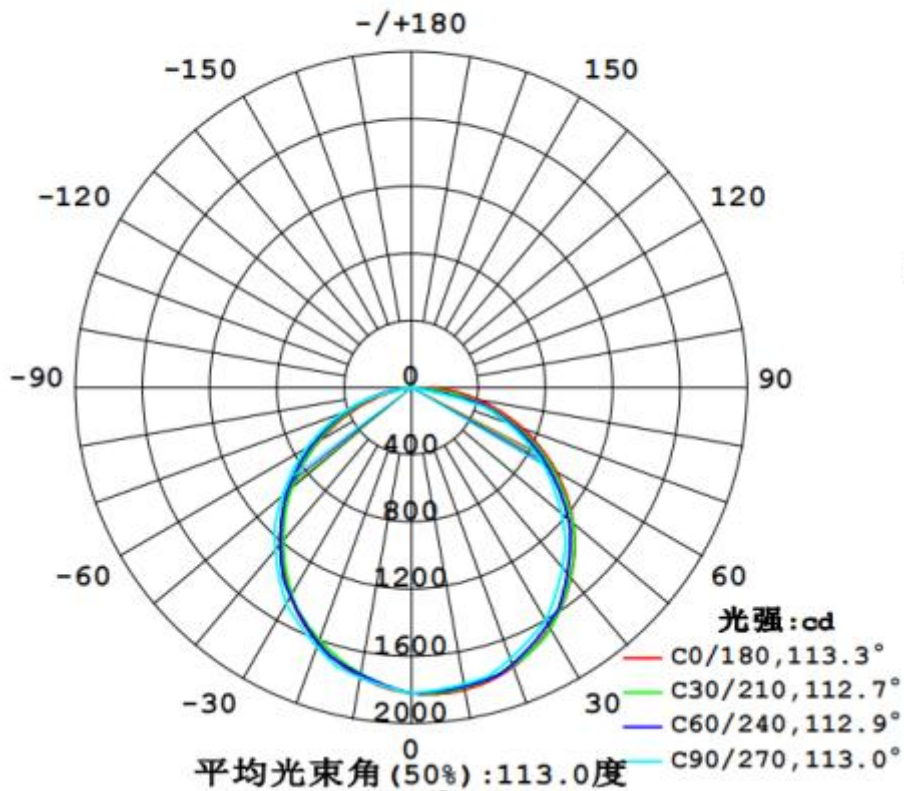


7. Installation Instruction

Recessed Installation

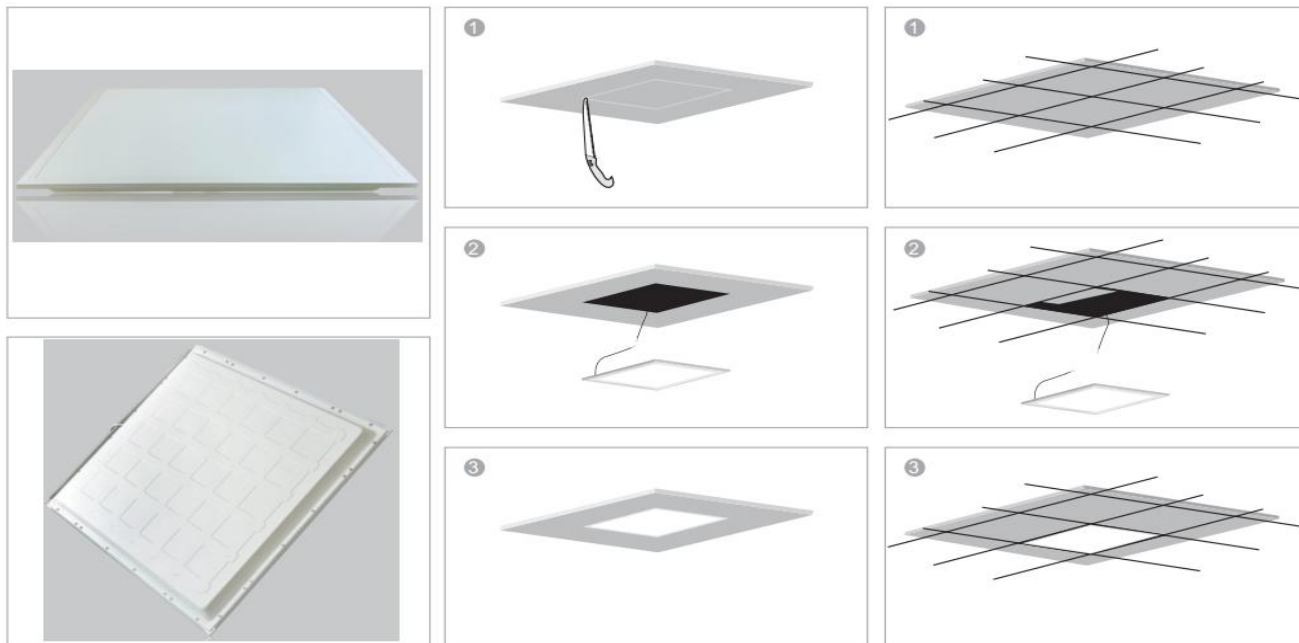

Suspended Installation

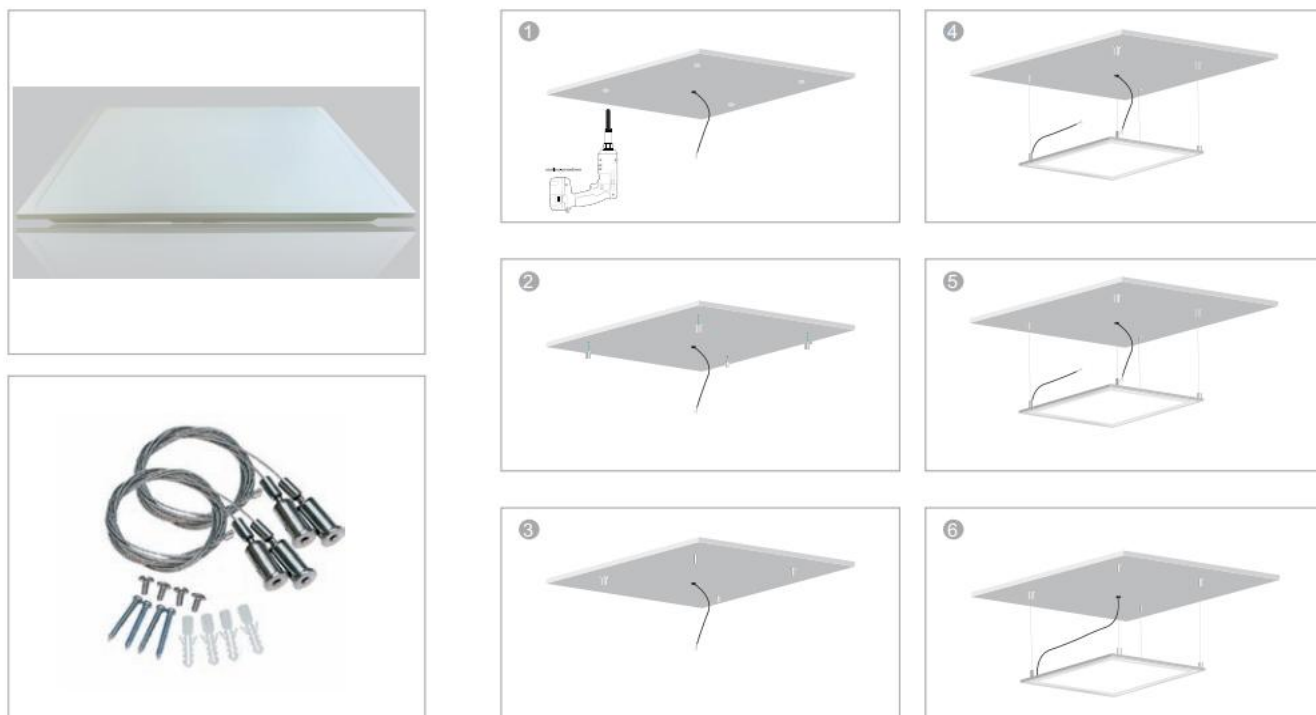

Ceiling mounted Installation

